

Standard Containers



Brief Description

FDC standard containers represent a modern and reliable solution for fast-deployable spaces across various industries. Whether used individually or as part of a larger modular complex, these containers are designed to offer maximum efficiency, structural strength, and comfort.

Built with galvanized steel frames and high-performance insulated panels, FDC containers meet today's construction and operational standards—making them ideal for temporary or permanent use in construction sites, public institutions, logistics hubs, educational units, and commercial applications.

Their modular nature allows for flexible configurations, stackability, and easy expansion over time. The clean and minimalistic interior finish in RAL 9002 ensures a bright and professional look, while exterior customization options such as wood-effect cladding or aluminum composite panels add aesthetic value and align with branding requirements.


FDC provides full-service solutions—from design and fabrication to transportation and on-site installation—ensuring each project is delivered with speed, precision, and quality. With excellent thermal and acoustic insulation, fire-resistant materials, and integrated electrical and sanitary systems, FDC standard containers are ready to perform in any environment.

Features

- Galvanized steel frame structure for durability and corrosion resistance
- Stackable up to three levels (depending on the model)
- Insulated sandwich panels with polyurethane or mineral wool (wall/roof/floor)
- Double-glazed PVC or aluminum joinery (RAL colors available)
- Interior wall and ceiling finishes in RAL 9002 or custom options
- Electrical system compliant with international standards (400/230 V, 50 Hz)
- Integrated lighting, outlets, switches, and optional heating/cooling units
- Plumbing and sanitary installations available for WC, showers, or full bathroom setups
- Modular combinations available for extended surface needs
- Delivered ready-to-use with fast installation by specialized teams
- Custom branding, façade cladding (wood effect, aluminum composite), and signage available on request

Universalcontainer 6.05mx2.44mx2.90m

Außenmaße (LxIxH):
6.05m x 2.44m x 2.90m
Innenmaße (LxIxH):
5.87m x 2.26m x 2.50m

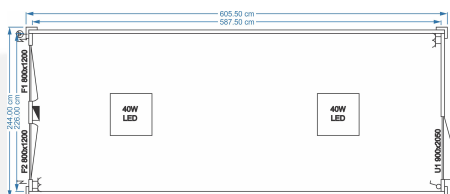


Features

- Robust steel frame made from cold-formed galvanized profiles, DX51D + Z100, ensuring durability and corrosion resistance
- Exterior and interior wall panels in polyurethane-insulated sandwich panels, 50 mm thick, with RAL 9002 finish (other finishes on request)
- Highly insulated roof and floor, with mineral wool (up to 200 mm) and fiber cement boards for fire resist-

Universalcontainer 6.05mx2.44mx2.90m

Außenmaße (LxIxH):
6.05m x 2.44m x 2.90m
Innenmaße (LxIxH):
5.87m x 2.26m x 2.50m

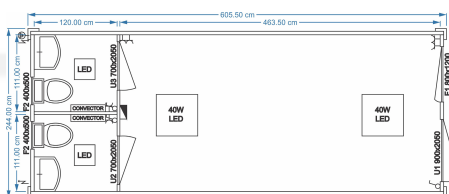


Features

- Robust steel frame made from cold-formed galvanized profiles, DX51D + Z100, ensuring durability and corrosion resistance
- Exterior and interior wall panels in polyurethane-insulated sandwich panels, 50 mm thick, with RAL 9002 finish (other finishes on request)
- Highly insulated roof and floor, with mineral wool (up to 200 mm) and fiber cement boards for fire resist-

Universalcontainer 6.05mx2.44mx2.90m

Außenmaße (LxIxH):
6.05m x 2.44m x 2.90m
Innenmaße (LxIxH):
5.87m x 2.26m x 2.50m

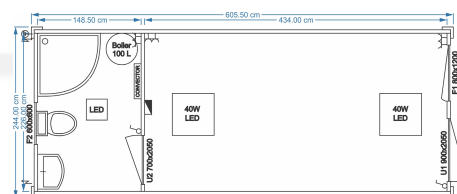


Features

- Robust steel frame made from cold-formed galvanized profiles, DX51D + Z100, ensuring durability and corrosion resistance
- Exterior and interior wall panels in polyurethane-insulated sandwich panels, 50 mm thick, with RAL 9002 finish (other finishes on request)
- Highly insulated roof and floor, with mineral wool (up to 200 mm) and fiber cement boards for fire resist-

Universalcontainer 6.05mx2.44mx2.90m


Außenmaße (LxIxH):
6.05m x 2.44m x 2.90m
Innenmaße (LxIxH):
5.87m x 2.26m x 2.50m

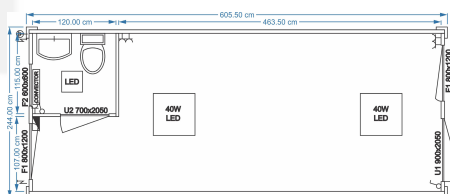

- Robust steel frame made from cold-formed galvanized profiles, DX51D + Z100, ensuring durability and corrosion resistance
- Exterior and interior wall panels in polyurethane-insulated sandwich panels, 50 mm thick, with RAL 9002 finish (other finishes on request)
- Highly insulated roof and floor, with mineral wool (up to 200 mm) and fiber cement boards for fire resist-

Universalcontainer 6.05mx2.44mx2.90m


Außenmaße (LxIxH):
6.05m x 2.44m x 2.90m
Innenmaße (LxIxH):
5.87m x 2.26m x 2.50m

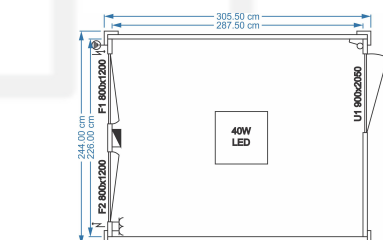

- Robust steel frame made from cold-formed galvanized profiles, DX51D + Z100, ensuring durability and corrosion resistance
- Exterior and interior wall panels in polyurethane-insulated sandwich panels, 50 mm thick, with RAL 9002 finish (other finishes on request)
- Highly insulated roof and floor, with mineral wool (up to 200 mm) and fiber cement boards for fire resist-

Universalcontainer 6.05mx2.44mx2.90m

Außenmaße (LxIxH):
6.05m x 2.44m x 2.90m
Innenmaße (LxIxH):
5.87m x 2.26m x 2.50m

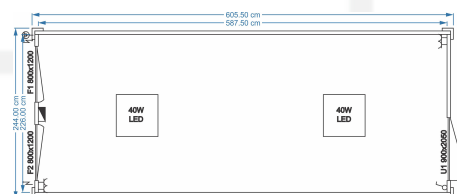

- Robust steel frame made from cold-formed galvanized profiles, DX51D + Z100, ensuring durability and corrosion resistance
- Exterior and interior wall panels in polyurethane-insulated sandwich panels, 50 mm thick, with RAL 9002 finish (other finishes on request)
- Highly insulated roof and floor, with mineral wool (up to 200 mm) and fiber cement boards for fire resist-